


GRIFO

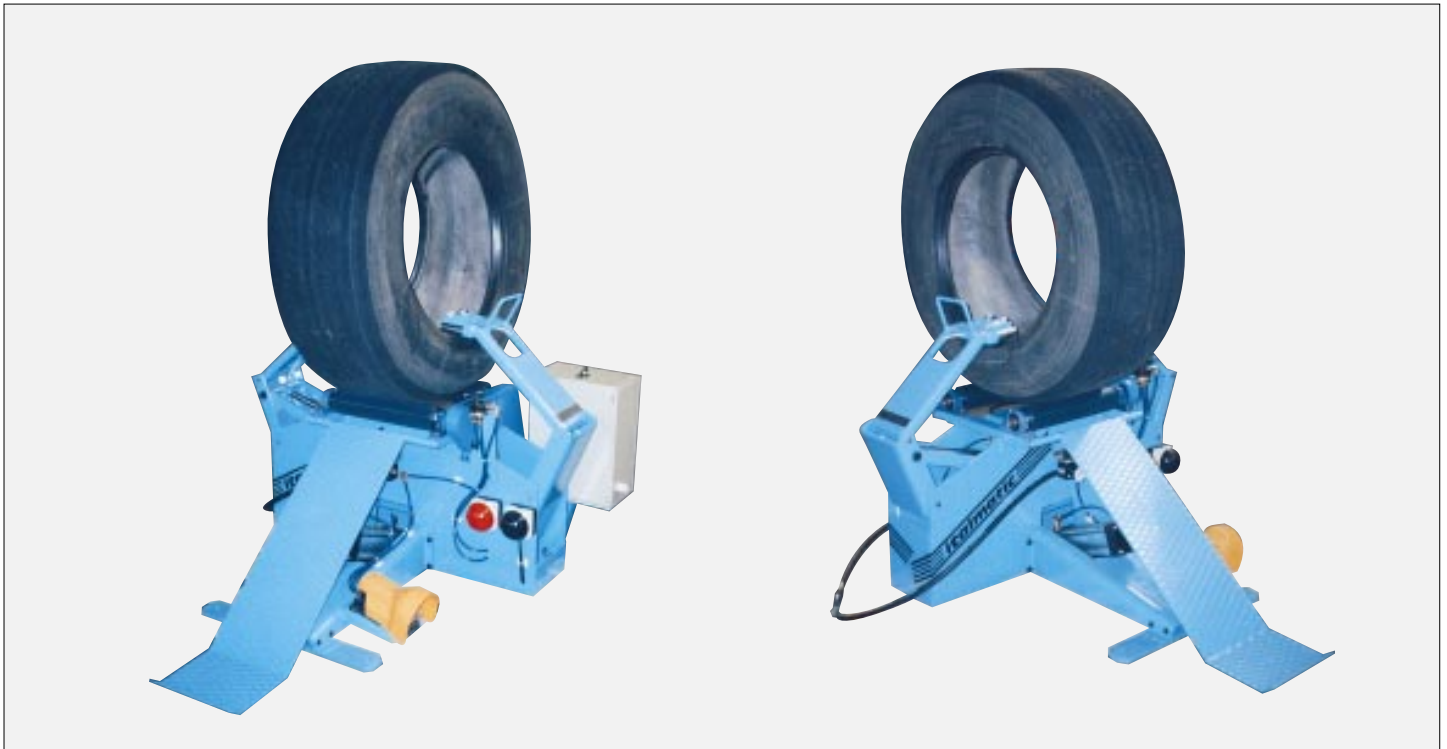

101097 GRIFO

Divaricatore, ispezionatore automatico, rotativo per pneumatici trasporto da 16" a 1200 x 24".
<i>Automatic, rotating spreader for 16" to 1200 x 24" truck tyres inspection.</i>
<i>Ouvre-pneus rotatif, automatique, pour inspecter les pneus Poids Lourds de 16" à 1200 x 24".</i>
<i>Automatischer, drehbarer Spreizer zur LKW-Reifen-Untersuchung von 16 bis 1200 x 24".</i>

Caratteristiche tecniche / Technical features / Caractéristiques techniques / Technische Daten

<ul style="list-style-type: none"> • 15-20 pneum./h. • P. 1500 mm. x L. 1650 mm. x H. 1100 mm. - P. Kg. 180 • Kw 0.37 • ø min. 800 mm. - ø max. 1380 mm. sez. min. 190 mm. - sez. max. 457 mm. 	<ul style="list-style-type: none"> • 15-20 tyres/h. • D. 1500 mm. x W. 1650 mm. x H. 1100 mm. - W. Kg. 180 • Kw 0.37 • min. ø 800 mm. - max. ø 1380 mm. min. sect. 190 mm. - max. sect. 457 mm.
<ul style="list-style-type: none"> • 15-20 pneus/h. • P. 1500 mm. x L. 1650 mm. x H. 1100 mm. - P. Kg. 180 • Kw 0.37 • ø min. 800 mm. - ø max. 1380 mm. sect. min. 190 mm. - sect. max. 457 mm. 	<ul style="list-style-type: none"> • 15-20 Reifen pro Stunde. • L. 1500 mm. x B. 1650 mm. x H. 1100 mm. - G. Kg. 180 • Kw 0.37 • min. Durchm. 800 mm. - max. Durchm. 1380 mm. min. Breite 190 mm. - max. Breite 457 mm.